


Instructions for the bus adapter with order code 00667525

The adapter can be operated by using two rotary switches and the push-button.
The device status will be displayed by the LEDs.

Rotary switches:

The rotary switches are used to set the new bus-address of the MFC.
The address must be compatible with the bus system.

Profibus 0...126
DeviceNet 0...63

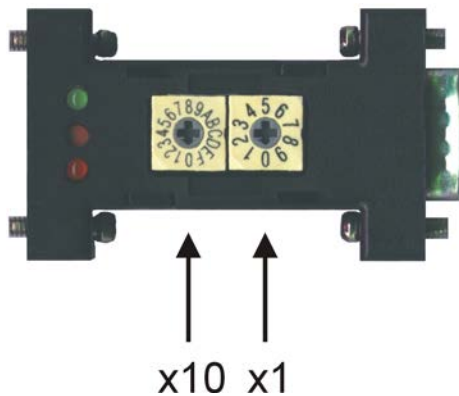

The rotary switch x10 can be set between 0 to F by using the hexadecimal format.
The switch x1 can be set between 0 and 9.

Examples for setting the bus-address:

x10	x1	Adresse
6 (6 · 10)	0	60
3 (3 · 10)	2	32
A (10 · 10)	3	103
B (11 · 10)	5	115

Push button:

By pushing the push-button the new address will be transferred to the MFC. A successful transmission is displayed via the green LED.

LEDs:

The red LED has three possible states, the green LED only one.

LED State	green LED	Red LED
on	The adapter and the device have the same bus-address.	The adapter and the device have not the same bus-address.
fast-flashing (approx. 10 times per sec.)	-	An incorrect bus-address could be set on the dip-switch (range error).
slow-flashing (approx. 1 time per sec.)	-	MFC without filed bus.