



Radar level meter for higher pressure ranges

- For level measurement up to 35 m
- 4...20 mA/Hart, 2 wires
- Adjustable with display/configuration module or PC
- ATEX approvals

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with



Type 8635

Digital electropneumatic Positioner SideControl



Type 8692

Digital electropneumatic Positioner for the integrated mounting on process control valves



Type 8644

Remote Process Actuation Control System AirLINE

Type description

Type 8137 is a non-contact radar level meter for continuous level measurement.

The unit is available in two variants:

- with thread and horn antenna (ø 40 mm).
Particularly suitable for use in small tanks and process vessels for the level measurement of practically any product.
- with flange and horn antenna (ø 40 or 75 mm).
Particularly suitable for use in storage tanks and process vessels for the level measurement of products such as solvents, hydrocarbons and fuels under extremely difficult process conditions.

Table of contents

| | |
|--|-----------|
| 1. General technical data | 3 |
| <hr/> | |
| 2. Approvals | 5 |
| 2.1. ATEX-Certification..... | 5 |
| <hr/> | |
| 3. Materials | 5 |
| 3.1. Chemical Resistance Chart – Bürkert resistApp..... | 5 |
| <hr/> | |
| 4. Dimensions | 6 |
| 4.1. Version with thread horn antenna..... | 6 |
| 4.2. Version with flange horn antenna..... | 7 |
| <hr/> | |
| 5. Performance specifications | 8 |
| 5.1. Measurement deviation diagram | 8 |
| <hr/> | |
| 6. Product operation | 8 |
| 6.1. Measuring principle | 8 |
| 6.2. Product operation notes | 9 |
| Operating techniques..... | 9 |
| Set up with display/configuration module | 9 |
| Set up with PACTware™/DTM and HART communication..... | 9 |
| <hr/> | |
| 7. Ordering information | 10 |
| 7.1. Bürkert eShop – Easy ordering and quick delivery..... | 10 |
| 7.2. Bürkert product filter..... | 10 |
| 7.3. Ordering chart..... | 10 |
| 7.4. Ordering chart accessories..... | 11 |

1. General technical data

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using.

Detailed information can be found in chapter [“3.1. Chemical Resistance Chart – Bürkert resistApp” on page 5.](#)

Non wetted parts

| | |
|--------------------------------|--|
| Housing | PBT, Stainless steel 316L (1.4404) |
| Cover | PC transparent |
| Seal between housing and cover | EPDM |
| Cable gland | PA |
| Blind plug | PA |
| Ground terminal | Stainless steel 316Ti/316L (1.4571/1.4435) |

Wetted parts

| | |
|--------------------|---|
| Process connection | Stainless steel 316L |
| Process seal | NBR with aramid fibres for device with thread process connection (for others versions not included in the delivery) |

| | |
|--------------|----------------------|
| Antenna | Stainless steel 316L |
| Antenna cone | PTFE (TFM 1600 PTFE) |
| Seal | Antenna system: FKM |

Dimensions Detailed information can be found in chapter [“4. Dimensions” on page 6.](#)

Weights 2...17.2 kg (depending on process connection and antenna)

Measuring variable Distance between the end of the level meter antenna and the product surface. Detailed information can be found in chapters [“5.1. Measurement deviation diagram” on page 8](#) and [“6.1. Measuring principle” on page 8.](#)

Measuring range Max. 35 m
Recommended measuring range:

- 0.05...15 m (recommended, with antenna Ø 40 mm)
- 0.05...35 m (recommended, with antenna Ø 75 mm)

Beam angle¹⁾

- 20° with antenna Ø 40 mm
- 10° with antenna Ø 75 mm

Damping (63% of the input value) 0...999 s, adjustable

Step response time²⁾ ≤3 s

Product accessories

Display LCD in full dot matrix (optional, must be ordered separately). Detailed information can be found in chapter [“7.4. Ordering chart accessories” on page 11.](#)

Performance data

Measurement deviation ±2 mm (measuring distance >0.5 m)
Detailed information can be found in chapter [“5.1. Measurement deviation diagram” on page 8.](#)

Measuring range resolution 1 mm

Measuring frequency K-Band (26 GHz technology)

Measuring cycle time Approx. 450 ms

Temperature drift

- Digital output: ±3 mm/10 K, max. 10 mm
- Current output: <0.03%/10K relating to the 16 mA span or ≤0.3%

Non-repeatability³⁾ ≤1 mm

Vibration resistance 4 g with 5...200 Hz according to EN 60068-2-6 (vibration at resonance)

Shock resistance 100 g, 6 ms according to EN 60068-2-27 (mechanical shock)

Electrical data

Operating voltage (U_n)

- Without display/configuration module:
 - 9.6...35 V DC
 - 9.6...30 V DC (Ex ia instrument)
- With display/configuration module:
 - 16...35 V DC
 - 16...30 V DC (Ex ia instrument)

Power Source (not supplied) Limited power source according to UL/EN 60950-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4

Starting current ≤3.6 mA; ≤10 mA for 5 ms after switching on

| | |
|--------------------------------|---|
| DC reverse polarity protection | Yes |
| Output signal | 4...20 mA/HART |
| Signal resolution | 0.3 μ A |
| Range of the output signal | 3.8...20.5 mA/HART (default setting) |
| Load resistor | $(U_n - U_{min.})/0.022$ A |
| Fault signal | Current output: mA value unchanged, 20.5 mA, 22 mA or <3.6 mA (adjustable) |
| Max. output current | 22 mA |
| Residual ripple (at DC) | <ul style="list-style-type: none"> For $9.6 \text{ V} < U_n < 18 \text{ V}$: $\leq 0.7 V_{eff}$ (16...400 Hz) For $18 \text{ V} < U_n < 35 \text{ V}$: $\leq 1.0 V_{eff}$ (16...400 Hz) |
| Voltage supply cable | <ul style="list-style-type: none"> Cable diameter: 5...9 mm Wire cross-section (spring-loaded terminals): <ul style="list-style-type: none"> – massive wire, stranded wire: 0.2...2.5 mm² (AWG 24...14) – stranded wire with end sleeve: 0.2...1.5 mm² (AWG 24...16) |

Medium data

| | |
|----------------------------|---|
| Process temperature | -40 °C...+130 °C (-40 °F...266 °F) |
| Process pressure | Vessel pressure: -1...40 bar (-100...4000 kPa/-14.5...580 psi) or according to flange rules |
| Dielectric constant (min.) | $\epsilon_r > 1.6$ |

Process/Port connection & communication

| | |
|-----------------------|---|
| Process connection | <ul style="list-style-type: none"> Thread G 1½" or NPT 1½" Flange DN 50 or DN 100 DIN 2501, 2" or 4" ANSI B16.5 |
| Electrical connection | Cable glands M20x1.5 |

Approvals and Certificates**Standards**

| | |
|--|--|
| Degree of protection according to IEC/EN 60529 | IP66/IP67 with M20x1.5 gland mounted and tightened |
| Overvoltage category according to IEC 61010-1 | Category III |
| Protection class according to IEC 61010-1 | Class III |

Directives

| | |
|-----------------------|--|
| CE directives | The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable) |
| NAMUR recommendations | <ul style="list-style-type: none"> NE21 – Electromagnetic compatibility of equipment NE43 – Signal level for fault information from measuring transducers NE53 – Compatibility of field devices and display/adjustment components NE107 – Self-monitoring and diagnosis of field devices |

Approvals

| | |
|------|--|
| ATEX | EN 60079-0, EN 60079-11, EN 60079-26 Detailed information can be found in chapter "2.1. ATEX-Certification" on page 5. |
|------|--|

Environment and installation

| | |
|------------------------|---|
| Ambient temperature | Operation and storage: -40 °C...+80 °C (-40 °F...+176 °F) |
| Relative air humidity | 20...85 %, without condensation |
| Height above sea level | <ul style="list-style-type: none"> By default: max. 2000 m With connected overvoltage protection: max. 5000 m |
| Pollution degree | Degree 4 (when used with fulfilled housing protection) |

1.) Outside the specified beam angle, the energy level of the radar signal is 50 % (-3 dB) less

2.) Time span after a sudden measuring distance change by max. 0.5 m in liquid applications, max 2 m with bulk solids applications, until the output signal has taken for the first time 90 % of the final value (IEC 61298-2)


3.) Already included in the measuring deviation

2. Approvals

2.1. ATEX-Certification


Note:

Devices with Ex certification have different technical data, see **Supplement ATEX Type 8137** ▶ under user manual.

| Certificate | Description |
|---|---|
|  | <p>EU-Type Examination Certificate Number: PTB 08 ATEX 2002X</p> <p>ATEX</p> <ul style="list-style-type: none"> • II 1/2G Ex ia IIC T6 Ga/Gb • II 2G Ex ia IIC T6 Gb <p>Measures to comply with ATEX requirements: refer to the Supplement ATEX Type 8137 ▶ under user manual. The Ex. certification is only valid if the Bürkert device is used as described in the supplement ATEX. If unauthorized changes are made to the device, the Ex. certification becomes invalid.</p> |

3. Materials

3.1. Chemical Resistance Chart – Bürkert resistApp

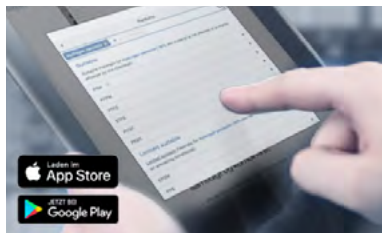

Bürkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start Chemical Resistance Check](#)

4. Dimensions

4.1. Version with thread horn antenna

Note:


Dimensions in mm

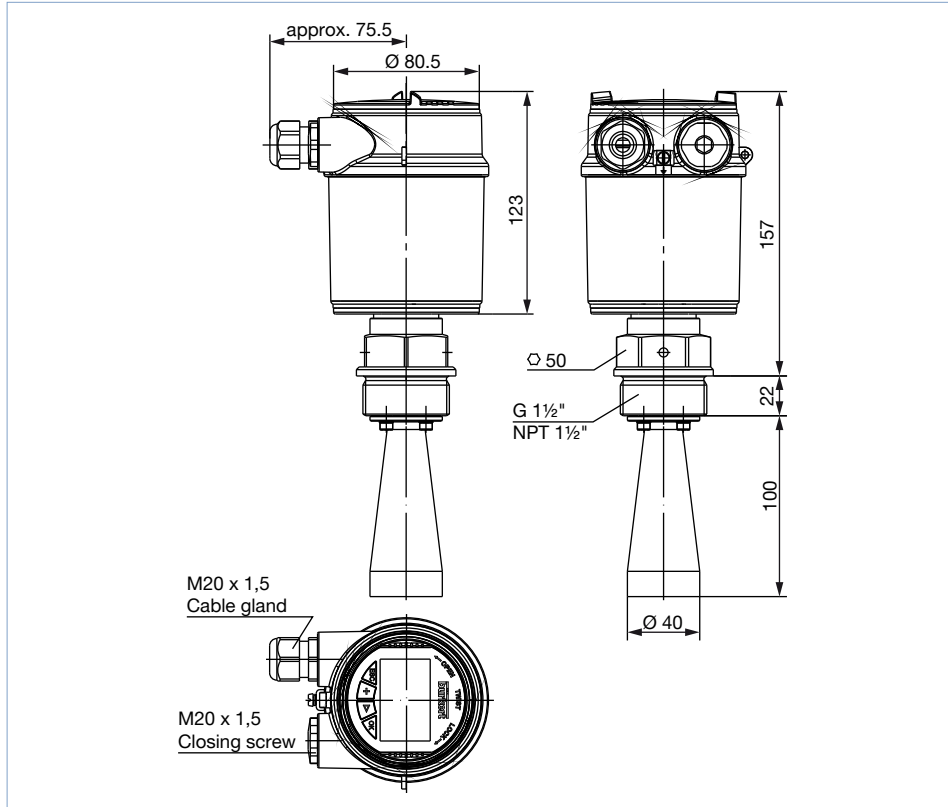

4.2. Version with flange horn antenna

Note:


Dimensions in mm

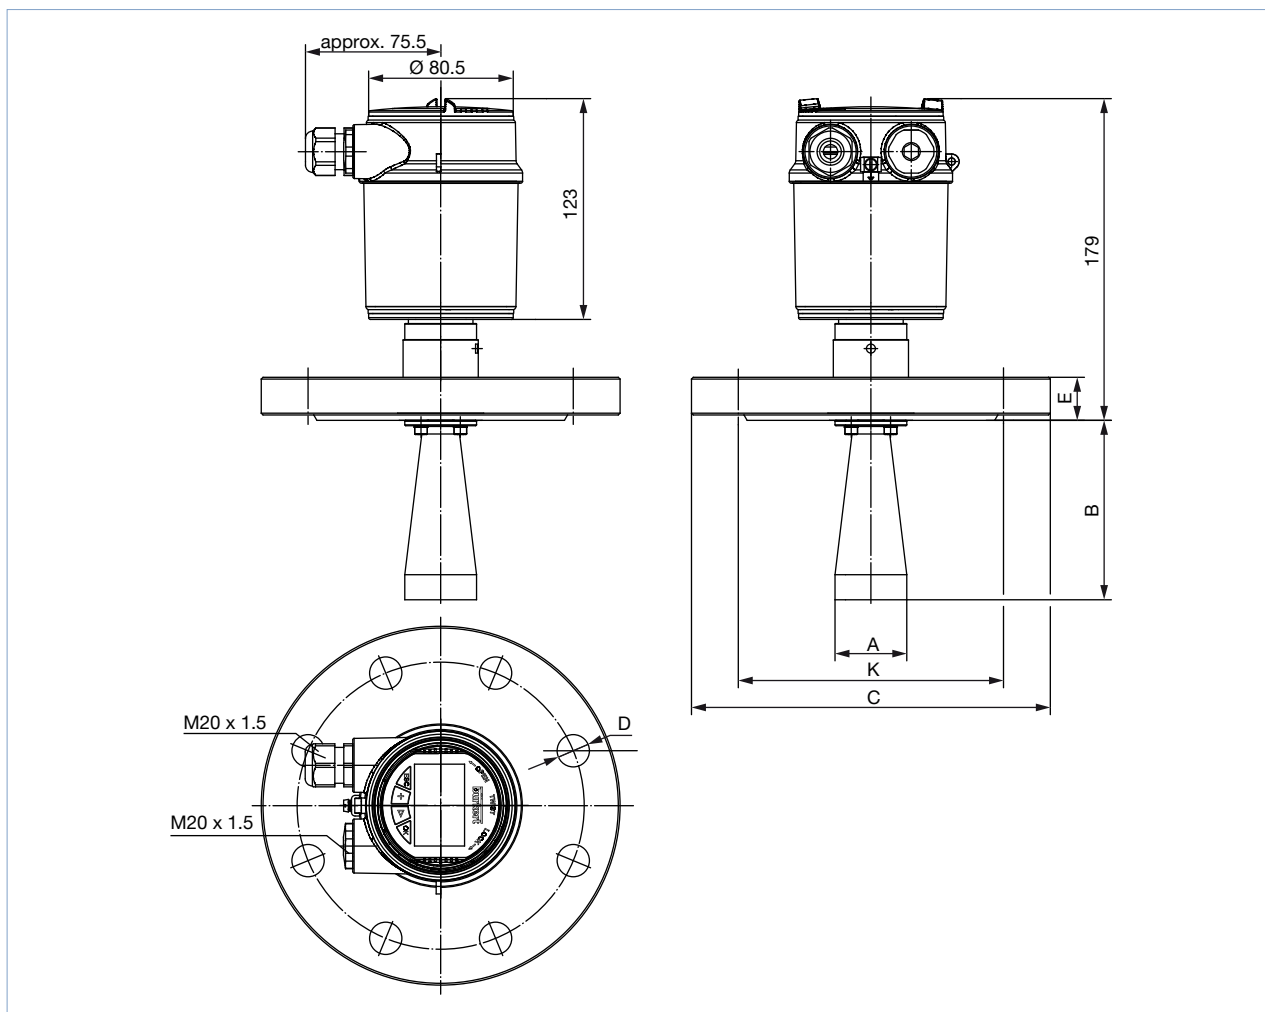

| Standard | DN | A | B | C | E | D | K |
|------------|-----|------|-----|---------|------|------------|---------|
| DIN 2501 | 50 | Ø 40 | 100 | Ø 165 | 20 | 4 x Ø 18 | Ø 125 |
| DIN 2501 | 100 | Ø 75 | 216 | Ø 220 | 20 | 8 x Ø 18 | Ø 180 |
| ANSI B16.5 | 2" | Ø 40 | 100 | Ø 152.4 | 19.1 | 4 x Ø 19.1 | Ø 120.7 |
| ANSI B16.5 | 4" | Ø 75 | 216 | Ø 228.6 | 23.9 | 8 x Ø 19.1 | Ø 190.5 |

5. Performance specifications

5.1. Measurement deviation diagram

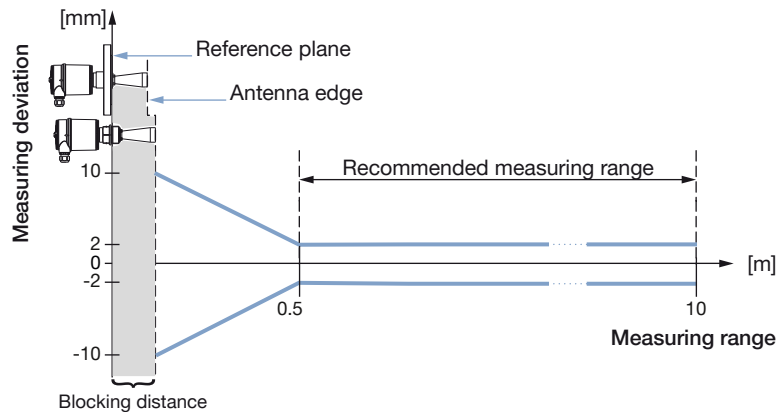

6. Product operation


6.1. Measuring principle

The radar measuring device consists of an electronic housing, a process connection element with antenna and a sensor. The antenna emits short radar pulses with a duration of approximate 1 ns to the medium. These pulses are reflected by the medium surface and received by the antenna as echoes. Radar waves travel at the speed of light. The running time of the radar pulses from emission to reception is proportional to the distance and hence to the level. The determined level is converted into an output signal and transmitted as a measured value.


The measuring range of the radar level measuring device begins physically at the end of the antenna. However, the min./max. adjustment begins at the reference plane. The position of the reference plane depends on the sensor version.

- Version with thread and horn antenna: the reference plane is the sealing surface on the hexagon.
- Version with flange and horn antenna: the reference plane is the lower side of the flange.

Version with thread and horn antenna



Version with flange and horn antenna



----- Reference plane

6.2. Product operation notes

Operating techniques

The measuring device provides different operating techniques:

- the display/configuration module
- the suitable Bürkert DTM in conjunction with adjustment software according to the FDT/DTM standard, e.g. PACTware™ and PC
- a HART handheld

The entered parameters are generally saved in the measuring device Type 8137. Optionally, parameters may also be uploaded and downloaded with the display/configuration module or saved in a file by using PACTware™/8137-DTM.

Set up with display/configuration module


| Display/configuration module | Description |
|------------------------------|---|
| | <p>The display/configuration module can be inserted into the measuring device and removed again at any time. It is not necessary to interrupt the power supply. The measuring device is adjusted via the four keys of the display/configuration module.</p> |

Set up with PACTware™/DTM and HART communication

| Assembly | Description | | | | | | | | |
|----------|--|-----|-------------|---|----------------------------|---|----------------|---|------------------|
| | <p>The measuring device can be operated thanks to PACTware™, via HART communication. An interface adapter is necessary for the adjustment with PACTware™. For the setup of the Type 8137, the DTM in the actual version must be used. The basic version of DTM incl. PACTware™ is available as a free-of-charge download from the internet at www.burkert.com ▶.</p> <p>Connecting the PC via HART</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Measuring device Type 8137</td> </tr> <tr> <td>2</td> <td>HART-USB Modem</td> </tr> <tr> <td>3</td> <td>Resistance 250 Ω</td> </tr> </tbody> </table> <p>Necessary components:</p> <ul style="list-style-type: none"> • Measuring device Type 8137 • PC with PACTware™ and suitable Bürkert DTM • HART-USB Modem • Resistance approx. 250 Ω • Power supply unit | No. | Description | 1 | Measuring device Type 8137 | 2 | HART-USB Modem | 3 | Resistance 250 Ω |
| No. | Description | | | | | | | | |
| 1 | Measuring device Type 8137 | | | | | | | | |
| 2 | HART-USB Modem | | | | | | | | |
| 3 | Resistance 250 Ω | | | | | | | | |

7. Ordering information

7.1. Bürkert eShop – Easy ordering and quick delivery




Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

7.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.





[Try out our product filter](#)

7.3. Ordering chart

Note:

All following versions are supplied without display/configuration module.

| Operating voltage | Output | Antenna version | Process connection | Electrical connection | Article no. |
|-----------------------------------|-----------------------------|-----------------|-----------------------------------|-----------------------|-------------|
| Standard version | | | | | |
| 9.6...35 V DC | 4...20 mA/HART (2 wires) | Ø 40 mm | G 1½ | Cable gland M20 x 1.5 | 560157 |
| | | | NPT 1½ | | 560159 |
| | | | Flange DN 50 DIN 2501/40 bar | | 560161 |
| | | | Flange 2" ANSI B16.5/150 lb RF | | 560163 |
| | | Ø 75 mm | Flange DN 100 DIN 2501/40 bar | | 560165 |
| | | | Flange 4" ANSI B16.5/150 lb RF | | 560167 |
| Ex version – ATEX approval | | | | | |
| 9.6...30 V DC | 4...20 mA/HART (2 wires) | Ø 40 mm | G 1½ | Cable gland M20 x 1.5 | 560158 |
| | | | NPT 1½ | | 560160 |
| | | | Flange DN 50 DIN 2501/16 bar | | 560162 |
| | | | Flange 2" ANSI B16.5/150 lb RF | | 560164 |
| | | Ø 75 mm | Flange DN 100 DIN 2501/40 bar | | 560166 |
| | | | Flange 4" ANSI B16.5/150 lb RF | | 560168 |

| Further versions on request | |
|--|--|
|  Process connection Flange: <ul style="list-style-type: none"> • DN 80 PN 40 Form C DIN 2501 • DN 150 PN 40 Form C DIN 2501 • DN 200 PN 40 Form C DIN 2501 • 3" 150 lb RF; ANSI B16.5 • 6" 150 lb RF; ANSI B16.5 • 8" 150 lb RF; ANSI B16.5 |  Additional Antenna Ø 48 mm, 95 mm |
|  Temperature Up to +450 °C |  Pressure Up to 160 bar (16000 kPa) |

7.4. Ordering chart accessories

| Description | Article no. |
|--|-------------|
| Set with 2 reductions M20x1.5/NPT½ + 2 neoprene flat seals for cable gland + 2 screw-plugs M20 x 1.5 | 551782 |
| Hart-USB Modem | 560177 |
| Set with a display/configuration module, a transparent cover and a seal ring | 559279 |
| Set with a transparent cover and a seal ring | 561006 |

DTS 1000105438 EN Version: M Status: RL (released | freigegeben | valide) printed: 18.12.2024

Bürkert – Close to You

For up-to-date addresses
please visit us at
www.burkert.com

DTS 1000105438 EN Version: M Status: RL (released | freigegeben | validé) printed: 18.12.2024

